

FLEXDRIVE

DRIVE SPEED SELECT DIAL

Available for the SJ519 TH, Skyjack's FLEXDRIVE option allows the operator to reduce drive speed while keeping all function speeds the same. By allowing low travel speed at high engine RPM, the operator is able to creep forward and reverse while maintaining all function and hydraulic performance required to complete the job.



OPTIONAL FEATURES

CARRIAGES & ADDITIONAL ATTACHMENTS

Skyjack's TH Series telehandlers offer a wide variety of carriages, fork options, and additional attachments designed to increase telehandler productivity to help you tackle ever-changing jobsites.



ELEVATE

MORE THAN TELEMATICS

ELEVATE provides the actionable insights to make your business more efficient. Skyjack has worked with customers to identify and provide the most important data points that solve day-to-day pain points in rental service and management.

Beyond hours and location provided by basic telematics systems, ELEVATE delivers machine specific alerts and analysis which can dramatically reduce unnecessary service calls and trips to site for diagnostic work.

These Skyjack specific group of features deliver immediate impact for your business:

- Machine fault codes
- Live engine data & history
- DEF warnings (where applicable)



It's operators and site supervisors that determine how your machine is treated. These roles need data to make the right decisions to get the work done, and to take care of your machines.

ELEVATE Live provides machine specific telematics data, as well as machine specific familiarization and documentation.

**To the operator.
At the machine.
When it's needed.**

Strictly relevant data like battery charging guide, battery life remaining, and active fault codes are provided to operators at the machine instantly via a QR code scan.

Machine documentation like emergency lowering procedure, visual pre-check guide, familiarization videos are all there with the tap of a finger. No downloading an app. No username or password required.



TH SERIES TELEHANDLERS



Skyjack Head Office
55 Campbell Rd.
Guelph, ON Canada N1H 1B9

Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
Main Switchboard: 1-800-265-2738
Tel: 519-837-0888
Fax: 519-837-8104
Email: skyjack@skyjack.com

www.skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures.

SIMPLY RELIABLE

Skyjack's focus on designing machines for the rental industry contributes to leading life cycle value achieved through:

- Competitive acquisition costs
- Consistently high residual values
- A reputation for robustness and reliability

Minimal machine downtime keeps units out on rent longer, earning you more money. Proven designs are what make all Skyjack models simply reliable.

DESIGNED FOR RENTAL


Skyjack became an industry leader by providing machine features that combine durability, quality, and serviceability, making our products world renowned for product reliability.

Our team understands the importance of maximum uptime, so our equipment is designed to provide just that. All major service points are easily accessible, enabling straight-forward troubleshooting and repairs.

Our in-house network of sales, service, and support spans worldwide. Since Skyjack was formed in 1985, we've grown to nearly 2,000 employees across 10 different countries. We have a network of long-term partners and work hand-in-hand with other business leaders and associations to contribute to a safer industry for all.

TH SERIES TELEHANDLERS

Skyjack telehandlers extend our principle of simple reliability into material handling equipment. Our TH Series is designed with all major service points easily accessible, limiting downtime and increasing our customers' utilization. With a variety of proprietary features, Skyjack's TH Series offer the rental industry's best life cycle value.

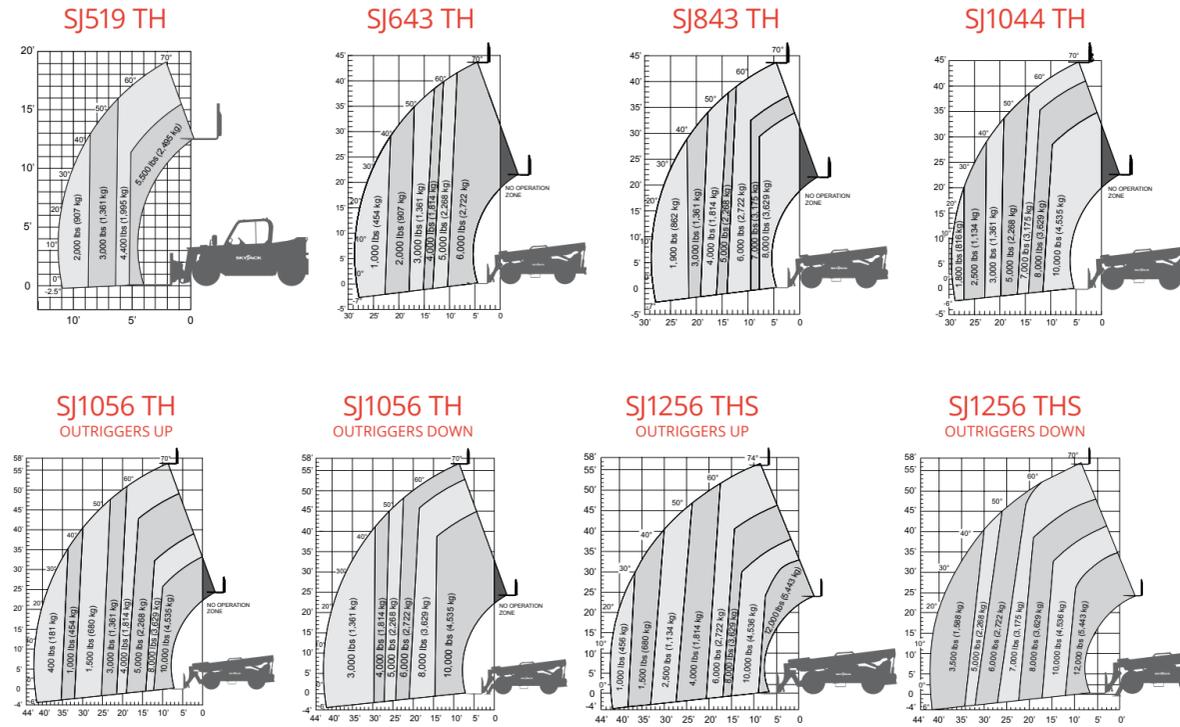

FLEXCAB™ INCREASED CAB FLEXIBILITY

Skyjack's TH Series Telehandlers feature an innovative cab design that allows fleet operators to easily convert between open and enclosed cabs with simple hand tools, providing increased flexibility for fleet movement and fast response to customer demands. Bolt-on/off window retention system leads to increased uptime, and minimizes costs incurred when replacing glass.



SMARTORQUE™ WHERE POWER MEETS EFFICIENCY

Through the use of improved gearing and a high-efficiency hydraulics package, Skyjack's TH Series' 74 hp engines deliver the same on-site job performance as higher horsepower units. SMARTORQUE™ is also engineered to require NO DPF, NO DEF, and NO other active exhaust after treatment.



Model	Capacity (lbs/kg)	Height (ft/m)	Reach (ft/m)	Weight (lbs/kg)	Wheelbase (ft/m)	Height (ft/m)	Height (ft/m)	Speed (mph/km/h)	Total Weight (lbs/kg)	
SJ519 TH	5,500 lbs (2,495 kg)	19' 1" (5.82 m)	4,400 lbs (1,996 kg)	11' 1" (3.38 m)	2,000 lbs (907 kg)	6' 4" (1.93 m)	5' 11.5" (1.81 m)	13' 5" (4.09 m)	15 mph (24 km/h)	10,600 lbs (4,808 kg)
SJ643 TH	6,000 lbs (2,722 kg)	43' 4" (13.21 m)	6,000 lbs (2,722 kg)	28' 7" (8.71 m)	1,000 lbs (454 kg)	7' 11" (2.41 m)	8' 5" (2.56 m)	19' 6" (5.94 m)	17 mph (27 km/h)	20,706 lbs (9,392 kg)
SJ843 TH	8,000 lbs (3,629 kg)	43' 4" (13.21 m)	6,000 lbs (2,722 kg)	28' 7" (8.71 m)	1,900 lbs (862 kg)	7' 11" (2.41 m)	8' 5" (2.56 m)	19' 6" (5.94 m)	17 mph (27 km/h)	23,006 lbs (10,435 kg)
SJ1044 TH	10,000 lbs (4,535 kg)	44' 3" (13.49 m)	7,000 lbs (3,175 kg)	29' 6" (8.99 m)	1,800 lbs (816 kg)	8' 1" (2.47 m)	8' 5" (2.56 m)	21' 2" (6.45 m)	15 mph (24 km/h)	28,226 lbs (12,803 kg)
SJ1056 TH	10,000 lbs (4,535 kg)	56' 3" (17.14 m)	6,000 lbs* (2,722 kg)	42' 6" (12.95 m)	3,000 lbs* (1,361 kg)	8' 1" (2.47 m)	8' 5" (2.56 m)	22' 2" (6.75 m)	15 mph (24 km/h)	33,336 lbs (15,121 kg)
SJ1256 THS	12,000 lbs (5,443 kg)	56' 3" (17.14 m)	7,000 lbs* (3,175 kg)	42' 6" (12.95 m)	3,500 lbs* (1,588 kg)	8' 6" (2.59 m)	8' 5" (2.56 m)	23' 1" (7.03 m)	15 mph (24 km/h)	36,625 lbs (16,613 kg)

*Outriggers down

SKYCODED™ COLOR CODED & NUMBERED WIRING

At the heart of every Skyjack machine, proven and simplistic control systems using Skyjack's color coded and numbered wiring system make our machines the easiest to troubleshoot and repair (No multiplex or CAN Bus components). Using a relay-based control system allows Skyjack's Telehandlers to operate with simpler components – less maintenance and lower costs.



READYHOOK™ INCREASED UTILIZATION

Skyjack's yoke-mounted lifting hook is standard on TH Series Telehandlers. With capacities that match the maximum lift capability of the telehandler the hook allows the safe under-slinging of loads and avoids the practice of using the forks as an underslung lifting device.

