

SJ3232 E

ELECTRIC SCISSOR LIFT



STANDARD FEATURES

- Drivable at full height, no stabilizers/outriggers
- Variable speed, dual rear wheel electric drive
- Dual holding brakes
- SKYCODED™ Color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- 3' (0.91 m) Roll out extension deck
- 24V DC Power source
- 110V AC Outlet on platform with GFI
- Low voltage battery protection
- 250 Ah batteries
- 25% Gradeability
- 28 mph (12.5 m/s) wind rating (up to 23' 6" (7.1 m))
- Solid rubber, non-marking tires
- Pothole protection system
- Tilt sensor (3.5° x 1.5°)
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down / lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- 2-Year Gold Leaf Warranty (5-year structural warranty)



- ZERO emissions



- <70 dB inherently quiet machine operation (excl. alarms)
- White noise/broadband alarms - *optional*



- 90% recyclable (by weight)



- ECOTRAY leak containment - *optional*
- Bio-degradeable hydraulic oil - *optional*



- Telematics – remote diagnostics reduces site visits (operational carbon foot print)

SJ3232 E ELECTRIC SCISSOR LIFT

Dimensions		SJ3232 E
A Work Height		37' 7" (11.46 m)
B Raised Platform Height		31' 7" (9.63 m)
C Lowered Platform Height		50" (1.27 m)
D Overall Width		32" (0.81 m)
E Overall Length		91.6" (2.33 m)
F Stowed Height (Rails Up)		94" (2.39 m)
G Stowed Height (Rails Down)		78.5" (1.99 m)
H Platform Width (Inside Dimension)		27.5" (0.70 m)
I Platform Length (Inside Dimension)		83" (2.10 m)
Specifications		SJ3232 E
Extension Deck (Roll Out)		3' (0.91 m)
Ground Clearance (Pothole Raised)		4.0" (10.2 cm)
Ground Clearance (Pothole Deployed)		0.5" (1.3 cm)
Wheelbase		69" (1.75 m)
Weight		5,850 lbs (2,654 kg)
Gradeability		25%
Turning Radius (Inside)		43" (1.09 m)
Turning Radius (Outside)		104" (2.64 m)
Lift Time (With Rated Load)		55 sec
Lower Time (With Rated Load)		55 sec
Drive Speed (Stowed)		2.1 mph (3.4 km/h)
Drive Speed (Raised)		0.6 mph (1.0 km/h)
Maximum Drive Height		Full Height
Capacity (Overall)		550 lbs (249 kg)
Distributed Capacity (Main Platform)		300 lbs (136 kg)
Distributed Capacity (Extension Deck)		250 lbs (113 kg)
Local Floor Load (With Rated Load)		TBD
Overall Floor Load (With Rated Load)		TBD
Maximum # of persons at 0 mph (0 m/s) wind rating		2
Maximum # of Persons up to 28 mph (12.5 m/s) Wind Rating		1 Up to 23' 6" (7.1 m)
Tire Type		Solid, N/M
Tire Size		16 x 5 x 12

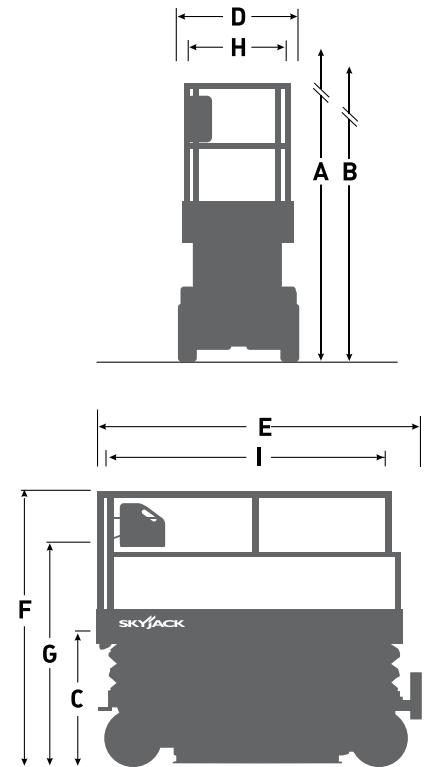
Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada N1H 1B9
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
 Main Switchboard: 1-800-265-2738
 Phone: 519-837-0888
 Fax: 519-837-8104
 Email: skyjack@skyjack.com

www.skyjack.com

† Standard lead times may be increased when optional equipment is added, consult factory.
 ‡ Capacities and machine weights may differ when accessories and options are added.

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. Work platforms have been tested to comply with ANSI and CSA standards as interpreted by Skyjack Inc.

ACCESSORYZERS [‡]

- Light duty pipe rack
- Heavy duty pipe rack
- Panel carrier
- Tool caddy
- ECOTRAY leak containment system
- Secondary Guarding Lift Enable (SGLE)
- Secondary Guarding Lift Sensor (SGLS)
- Perimeter lights (Cannot be combined with dual flashing lights)

OPTIONS [†]

- Flashing light
- Dual flashing lights
- White noise alarm
- Coiled control box cord
- AGM Batteries
- Lockable swingout trays
- Full height spring hinged entry gate
- Bio oil
- Non-destructive testing
- ELEVATE telematics (1-year, 3-year or 5-year plans available)
- Extended warranty (3-year or 5-year plans available)

SKYJACK
 simply reliable