

## PRELIMINARY SPECIFICATIONS

# SJ9263 RT

## ROUGH TERRAIN SCISSORS



### STANDARD FEATURES

- AXLDRIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Drivable at 33' (10.05 m)
- 30% Gradeability
- Wet disc SAHR brakes (rear axle)
- SKYCODED™ Color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Kubota D1305 Tier 4F diesel engine
- Auto leveling outriggers
- Self-centering scissor design to support optional dual extension decks
- Lockable power disconnect switch
- Flashing light
- Proportional controls
- 1,200 lbs (1,247 kg) Capacity
- Oversized platform with optimal clearance over side of machine
- Fold down hinged railing system
- Full height spring hinged entry gates
- 5' (1.52 m) Roll-out extension deck
- High strength and impact resistant composite control box
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (4.5° x 2.5°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion audible alarm
- Lanyard attachment points
- Tie down / lifting lugs
- Grip lug solid tires
- Telematics ready
- 5-Year warranty on controller
- 2-Year Gold Leaf Warranty (5-year structural warranty)

### OPTIONS

- Kubota 31hp WG972 dual fuel engine
- Dual 5' (1.52 m) roll-out extension deck
- Auto leveling outriggers (standard on SJ9253 RT)
- 3.5 kW Belt driven generator
- Diesel scrubber
- Positive air shut-off valve
- Cold weather start kit  
(Recommended for regions where average monthly low temperatures can reach 14°F / -10°C. Includes hydraulic oil tank heater, battery blanket, coolant or block heater)
- Arctic weather package  
(Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C. Includes cold weather start kit plus 60/40 coolant, arctic engine and gear oil)
- Heavy duty pipe rack
- Tool caddy
- Material handling stand
- Secondary Guarding Lift Enable (SGLE)
- Bio oil
- ELEVATE telematics
- Non-destructive testing
- Non-marking grip lug, solid tires
- Warranty options (3-year or 5-year plans available)

Preliminary specifications at time of printing.

† Standard lead times may be increased when optional equipment is added, consult factory.



‡ Capacities and machine weights may differ when options are added.

NA/ENG 02/2020

**SKYJACK**  
simply reliable

# SJ9263 RT ROUGH TERRAIN SCISSORS

Dimensions	SJ9263 RT
<b>A</b> Work Height	69' (21.03 m)
<b>B</b> Raised Platform Height	63' (19.20 m)
<b>C</b> Lowered Platform Height	91" (2.31 m)
<b>D</b> Overall Width	90.6" (2.30 m)
<b>E</b> Overall Length	174" (4.42 m)
<b>F</b> Stowed Height (Rails Up)	135" (3.42 m)
<b>G</b> Stowed Height (Rails Down)	103.5" (2.63 m)
<b>H</b> Platform Width (Inside Dimension)	75" (1.90 m)
<b>I</b> Platform Length (Inside Dimension)	170" (4.31 m)
Specifications	SJ9263 RT
Extension Deck	5' (1.52 m)
Ground Clearance	10" (26 cm)
Wheelbase	119" (3.02 m)
Weight	20,815 lbs (9,440 kg)
Gradeability	30%
Turning Radius (Inside)	128" (3.25 m)
Turning Radius (Outside)	252" (6.40 m)
Lift Time (With Rated Load)	75 sec
Lower Time (With Rated Load)	50 sec
Drive Speed (Stowed)	3.0 mph (4.8 km/h)
Drive Speed (Raised)	0.6 mph (1.0 km/h)
Maximum Drive Height	33' (10.06 m)
Capacity (Overall)	1,200 lbs (544 kg)
Main Platform (With 1 Extension Deck)	700 lbs (317 kg)
Front Extension Deck	500 lbs (227 kg)
Maximum Wind Rating	28 mph (12.5 m/s)
Personnel Rating at Max Wind Rating	4
Tire Type	Solid
Tire Size	33 x 12-20
Diesel Engine	Kubota D1305 - 24.8 HP (18.5 KW)
Fuel Tank Capacity	13 gal. (49 L)
Hydraulic Reservoir	23 gal. (87 L)

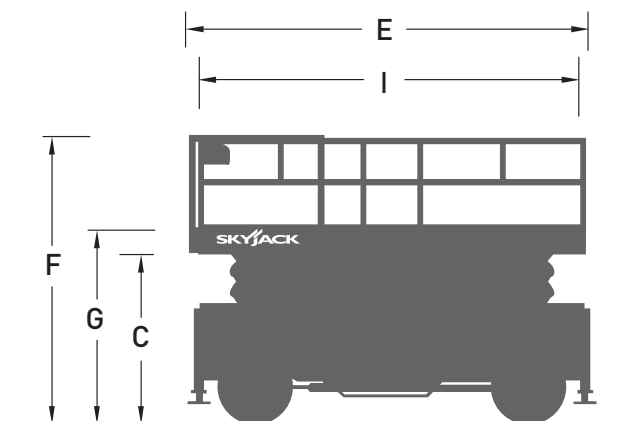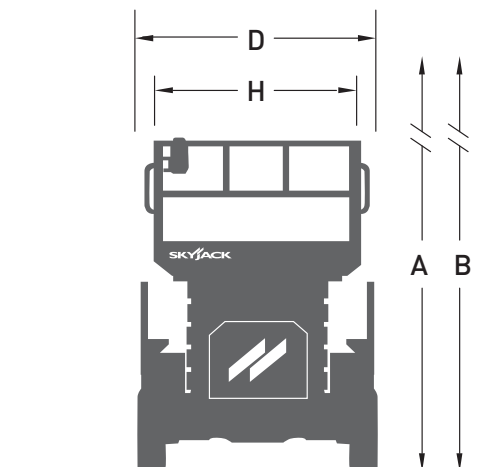

## Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada N1H 1B9  
 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)  
 Main Switchboard: 1-800-265-2738  
 Phone: 519-837-0888  
 Fax: 519-837-8104  
 Email: skyjack@skyjack.com

[www.skyjack.com](http://www.skyjack.com)

**SKYJACK**  
 simply reliable