

TELEHANDLER

ATTACHMENT GUIDE



STANDARD CARRIAGES

Standard Floating Pin Carriages feature an open carriage design further adding to increased operator visibility.



Carriage Size	48 in. (1.21 m)	48 in. (1.21 m)	48 in. (1.21 m)	60 in. (1.52 m)	60 in. (1.52 m)	72 in. (1.82 m)	72 in. (1.82 m)
Capacity	5,500 lbs (2,494 kg)	10,000 lbs (4,535 kg)	12,000 lbs (5,443 kg)	10,000 lbs (4,535 kg)	12,000 lbs (5,443 kg)	10,000 lbs (4,535 kg)	12,000 lbs (5,443 kg)
Weight*	350 lbs (158 kg)	417 lbs (189 kg)	542 lbs (245 kg)	456 lbs (206 kg)	598 lbs (271 kg)	494 lbs (224 kg)	642 lbs (291 kg)
Part Number	246428	241738	243880	246421	243870	243870	241740
Model Availability							
SJ519 TH	•						
SJ643 TH		•		•		•	
SJ843 TH		•		•		•	
SJ1044 TH & THS		•		•		•	
SJ1056 TH & THS		•		•		•	
SJ1256 THS			•		•		•

*approximate weight without forks

SIDE TILT CARRIAGES

Featuring +/- 10° rotation side to side, a Side Tilt Carriage is ideal when a telehandler is not level or when placing loads on uneven surfaces.



Carriage Size	48 in. (1.21 m)	48 in. (1.21 m)	48 in. (1.21 m)	60 in. (1.52 m)	60 in. (1.52 m)	72 in. (1.82 m)	72 in. (1.82 m)
Capacity	4,700 lbs (2,131 kg)	10,000 lbs (4,535 kg)	11,000 lbs (4,989 kg)	10,000 lbs (4,535 kg)	11,000 lbs (4,989 kg)	10,000 lbs (4,535 kg)	11,000 lbs (4,989 kg)
Weight*	582 lbs (263 kg)	773 lbs (350 kg)	822 lbs (372 kg)	829 lbs (376 kg)	892 lbs (404 kg)	869 lbs (394 kg)	1,005 lbs (455 kg)
Part Number	246429	246424	246426	246425	246427	246423	205200**
Model Availability							
SJ519 TH	•						
SJ643 TH		•		•		•	
SJ843 TH		•		•		•	
SJ1044 TH & THS		•		•		•	
SJ1056 TH & THS		•		•		•	
SJ1256 THS			•		•		•

**aftermarket only

*approximate weight without forks

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position



SIDE SHIFT CARRIAGE

Enabling the carriage to be shifted right or left, Skyjack's Side Shift Carriage is ideal for precise load placement without repositioning the telehandler.

Carriage Size	48 in. (1.21 m)
Capacity	4,000 lbs (1,814 kg)
Weight*	547 lbs (248 kg)
Part Number	206852
Model Availability	
SJ519 TH	•
SJ643 TH	
SJ843 TH	
SJ1044 TH & THS	
SJ1056 TH & THS	
SJ1256 THS	

*approximate weight without forks

SWING CARRIAGE

With +/- 45° swing rotation left or right, Skyjack's Swing Carriage allows operators to place loads around corners and maneuver through tight openings.

Carriage Size	72 in. (1.82 m)	72 in. (1.82 m)
Capacity	10,000 lbs (4,535 kg)	12,000 lbs (5,443 kg)
Weight*	918 lbs (416 kg)	1,005 lbs (455 kg)
Part Number	246431	205215
Model Availability		
SJ519 TH		
SJ643 TH	•	
SJ843 TH	•	
SJ1044 TH & THS	•	
SJ1056 TH & THS	•	
SJ1256 THS		•

*approximate weight without forks



All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position



FORK POSITIONER CARRIAGE

Skyjack's Fork Positioner Carriage enables operators to adjust fork widths without leaving the cab, significantly increasing safety and productivity.

Carriage Size	53 in. (1.34 m)
Capacity	12,000 lbs (5,443 kg)
Weight*	641 lbs (290 kg)
Part Number	206172
Model Availability	
SJ643 TH	•
SJ843 TH	•
SJ1044 TH & THS	•
SJ1056 TH & THS	•
SJ1256 THS	•

*approximate weight without forks

SKID STEER ATTACHMENT ADAPTER PLATE

Skyjack's Skid Steer Attachment Plate increases the versatility of SJ519 TH machines by enabling the use of a wide variety of skid steer attachments, boosting productivity and utilization.

Capacity	5,500 lbs (2,494 kg)
Weight*	265 lbs (120 kg)
Part Number	240803
Model Availability	
SJ519 TH	•
SJ643 TH	
SJ843 TH	
SJ1044 TH & THS	
SJ1056 TH & THS	
SJ1256 THS	

*approximate weight without forks



All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

HIGH CAPACITY JIB BOOM

When equipped, the High-Capacity Jib Boom allows operators to safely under-sling loads with additional forward reach and height relative to the READYHOOK™ lifting hook.

Length	2 ft. (0.60 m)
Capacity	10,000 lbs (4,535 kg)
Weight*	497 lbs (225 kg)
Part Number	157121
Model Availability	
SJ643 TH	•
SJ843 TH	•
SJ1044 TH & THS	•
SJ1056 TH & THS	•
SJ1256 THS	•

*approximate weight



TRUSS BOOMS

Designed for applications requiring additional reach, Truss Booms help operators place materials such as beams and roof trusses with speed and precision.

Length	6 ft. (1.82 m)	12 ft. (3.65 m)	15 ft. (4.57 m)
Capacity	2,000 lbs (907 kg)	2,000 lbs (907 kg)	2,000 lbs (907 kg)
Weight*	267 lbs (121 kg)	570 lbs (258 kg)	653 lbs (296 kg)
Part Number	206855	927448	920337
Model Availability			
SJ519 TH	•		
SJ643 TH		•	
SJ843 TH		•	
SJ1044 TH & THS		•	•
SJ1056 TH & THS		•	•
SJ1256 THS		•	•

*approximate weight

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

MATERIAL BUCKET

When equipped, Light Material Buckets make quick work of handling loose material, such as jobsite cleanup or transporting gravel across site.



Size	0.5 Cu.Yd. / 66 in. (1.67 m)	1.75 Cu.Yd. / 96 in. (2.43 m)
Capacity	4,000 lbs (1,814 kg)	4,300 lbs (1,950 kg)
Weight*	646 lbs (293 kg)	1,164 lbs (527 kg)
Part Number	206856	927450
Model Availability		
SJ519 TH	•	
SJ643 TH		•
SJ843 TH		•
SJ1044 TH & THS		•
SJ1056 TH & THS		•
SJ1256 THS		•


*approximate weight

Not designed for digging as digging can cause structural damage to telehandler.

SJ519 TH HYDRAULIC CARRIAGE CONNECT

Skyjack's Hydraulic Quick-Connect system enables the changing of attachments and carriages in one swift motion without leaving the cab, increasing productivity and safety.

Available on SJ519 TH telehandlers.

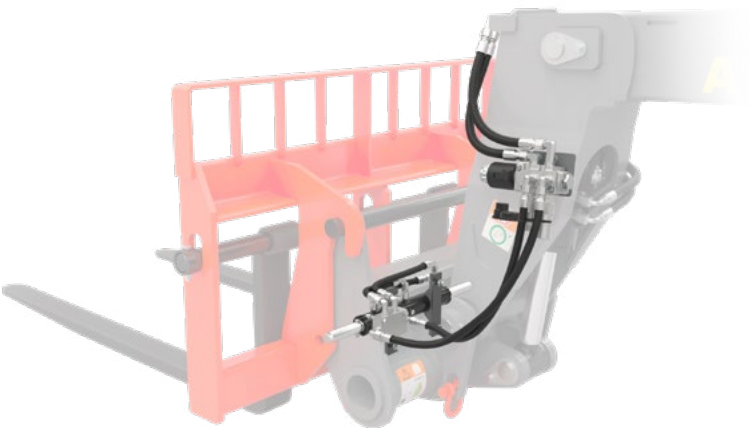

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

ZB ADDITIONAL ATTACHMENTS

STANDARD QUICK-ATTACH CARRIAGE

Designed for the rigors of heavy-duty work, this rugged floating pin carriage helps bolster jobsite efficiency.

Carriage Width	72 in. (1.82 m)
Capacity	20,000 lbs (9,071 kg)
Weight*	736 lbs (333 kg)
Part Number	413612

*approximate weight

FORK POSITIONER CARRIAGE

Eliminate manual physical adjustment and enable operators to adjust fork widths without leaving their seat, significantly increasing safety and productivity.

Carriage Width	72 in. (1.82 m)	84 in. (2.13 m)
Capacity	19,000 lbs (8,618 kg)	19,000 lbs (8,618 kg)
Weight*		
Part Number	413583	413578

*approximate weight

FORK POSITIONER + SIDE SHIFT CARRIAGE

With the versatility of a Fork Positioner and utility of a Side Shift Carriage, this combination carriage is unrivaled for productivity and safety.

Carriage Width	50 in. (1.72 m)	72 in. (1.82 m)	84 in. (2.13 m)
Capacity	19,000 lbs (8,618 kg)	19,000 lbs (8,618 kg)	19,000 lbs (8,618 kg)
Weight*			
Part Number	413616	413580	413582

*approximate weight

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

HYDRAULIC WINCH

When equipped, Hydraulic Winch option allows Skyjack's ZB2044 to lift heavy machinery, equipment, and materials. Used for jobs such as pipeline work, equipment maintenance, framing, loading/unloading, etc.


Capacity	15,000 lbs (6,803 kg)
Hook Capacity	8 ton. (8,000 kg)
Weight*	1,500 lbs (680 kg)
Part Number	413628

*approximate weight



HIGH CAPACITY JIB BOOM

Increases reach over obstacles by extending boom length, enabling safe under-slinging of loads. Eight swivel hook positions allow for operators to easily understand the load chart to ensure safe lifting of heavy loads.

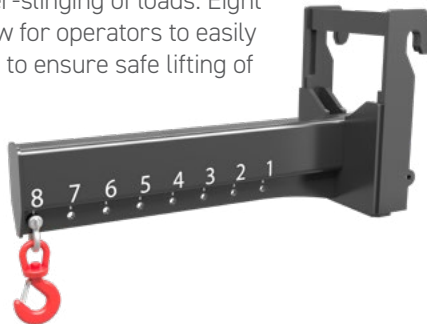

Capacity	20,000 lbs (9,071 kg)
Length	5 ft. (1.52 m)
Swivel Hook Capacity	11 ton. (11,000 kg)
Weight*	944 lbs (428 kg)
Part Number	413583

*approximate weight

LIGHT MATERIAL HANDLING BUCKET

When equipped, Light Material Buckets make quick work of handling loose material, such as jobsite cleanup or transporting gravel across site.

Volume / Width	2 Cu. Yd. / 84 in. (2.13 m)
Capacity	4,000 lbs (1,814 kg)
Weight*	1,700 lbs (771 kg)
Part Number	413620

*approximate weight

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

PIPE & POLE CLAMP

Featuring dual independent clamping, the Pipe and Pole Clamp is designed to pick up and clamp down evenly on unstable loads for safe and easy transport.

Capacity	18,000 lbs (8165 kg)
Overall Width	84 in. (2.13 m)
Fork Spacing	72 in. (1.82 m)
Fork Dimensions	2.5 in. x 6 in. x 60 in.
Weight	3,400 lbs (1542 kg)

*approximate weight



ROTATING PIPE & POLE MANIPULATOR

110° Rotation allows operator to position, remove, and stack support beams used in construction of bridges, highways, utility poles, etc.

Capacity	8,000 lbs (3,628 kg)
Diameter Open	22 in. (0.55 m)
Diameter Closed	9 in. (0.22 m)
Weight*	2,350 lbs (158 kg)
Part Number	413632

*approximate weight



All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

FORKS

STANDARD TAPER 4 IN. WIDE

Dimensions (TxWxL)	1.57x3.94x48	1.57x3.94x60	2x4x48	2x4x60	2.36x3.94x48	2.36x3.94x60	2.36x3.94x72
Capacity	5,500 lbs (2,494 kg)	5,500 lbs (2,494 kg)	8,000 lbs (3,628 kg)	8,000 lbs (3,628 kg)	10,000 lbs (4,535 kg)	10,000 lbs (4,535 kg)	10,000 lbs (4,535 kg)
Weight*	107 lbs (48 kg)	126 lbs (57 kg)	145 lbs (65 kg)	172 lbs (78 kg)	170 lbs (77 kg)	200 lbs (90 kg)	234 lbs (106 kg)
Part Number (set)	205756	205757	920356	920357	220586	228620	228621
Part Number (each)	206298	206299	932350	920359	220588	228622	228623
Model Availability							
SJ519 TH	•	•					
SJ643 TH			•	•	•	•	•
SJ843 TH			•	•	•	•	•
SJ1044 TH & THS					•	•	•
SJ1056 TH & THS					•	•	•
SJ1256 THS							
ZB2044							

*approximate weight

STANDARD TAPER 5 IN. WIDE

Dimensions (TxWxL)	2x5x48	2x5x60	2.25x5x48	2.25x5x60	2.25x5x72
Capacity	9,200 lbs (4,173 kg)	9,200 lbs (4,173 kg)	12,000 lbs (5,443 kg)	12,000 lbs (5,443 kg)	12,000 lbs (5,443 kg)
Weight*	174 lbs (78 kg)	187 lbs (84 kg)	201 lbs (91 kg)	213 lbs (96 kg)	253 lbs (114 kg)
Part Number (set)	931740	932282	929702	929703	921329
Part Number (each)	931354	931839	930272	930273	921149
Model Availability					
SJ519 TH					
SJ643 TH	•	•	•	•	•
SJ843 TH	•	•	•	•	•
SJ1044 TH & THS			•	•	•
SJ1056 TH & THS			•	•	•
SJ1256 THS			•	•	•
ZB2044					

*approximate weight

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

STANDARD TAPER 6 IN. WIDE

Dimensions (TxWxL)	2 3/4 x 6 x 48	2 3/4 x 6 x 60	2 3/4 x 6 x 72	2 3/4 x 6 x 96
Capacity	22,100 lbs (10,024 kg)	22,000 lbs (907 kg)	22,000 lbs (907 kg)	22,000 lbs (907 kg)
Weight*	304 lbs (137 kg)	343 lbs (155 kg)	399 lbs (180 kg)	518 lbs (234 kg)
Part Number (set)	413651	413652	413653	413654
Part Number (each)	413551	413552	413553	413554
Model Availability				
SJ519 TH				
SJ643 TH				
SJ843 TH				
SJ1044 TH & THS				
SJ1056 TH & THS				
SJ1256 THS				
ZB2044	•	•	•	•

*approximate weight

FULLY TAPERED (AFTERMARKET ONLY)

Dimensions (TxWxL)	1.75x5x48	1.75x5x60	1.75x7x48	1.75x7x60
Capacity	6,000 lbs (2,721 kg)	6,000 lbs (2,721 kg)	6,000 lbs (2,721 kg)	6,000 lbs (2,721 kg)
Weight*	146 lbs (66 kg)	162 lbs (73 kg)	199 lbs (90 kg)	221 lbs (100 kg)
Part Number (set)	920605	920606	929700	929701
Part Number (each)	920603	920604	930274	930275
Model Availability				
SJ519 TH				
SJ643 TH	•			
SJ843 TH	•			
SJ1044 TH & THS		•	•	•
SJ1056 TH & THS		•	•	•
SJ1256 THS			•	•
ZB2044				

*approximate weight

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position

SPECIALTY

Dimensions (LxWxT)	2.36x3.94x48 (Fork Postioner)	1.57x3.94x48 Lumber**	1.97x1.50x48 Block**	1.97x1.50x48 Block**	2x2x46 Block**
Capacity	10,000 lbs (4,535 kg)	5,500 lbs (2,494 kg)	5,500 lbs (2,494 kg)	6 * 1,500 lbs (680 kg)	6 * 2,000 lbs (907 kg)
Weight*	170 lbs (77 kg)	91 lbs (41 kg)	58 lbs (26 kg)	69 lbs (31 kg)	81 lbs (36 kg)
Part Number (kit)	220587	205758	205759	207704	206168
Part Number (each)	220588	206300	206301	922006	
Model Availability					
SJ519 TH		•	•		
SJ643 TH	•			•	
SJ843 TH	•			•	
SJ1044 TH & THS	•			•	
SJ1056 TH & THS	•			•	
SJ1256 THS	•				•
ZB2044					

*approximate weight

**aftermarket only

All carriages and attachments feature Skyjack's standard 2-Pin Quick Attach design for simple and easy carriage changes. Please see specific telehandler load charts as capacities differ between machines.

IMPORTANT

- Telehandler machine design complies with ANSI/ITSDF B56.6-2016 and CSA B335-15 stability requirements for rough terrain forklifts
- Rated capacities shown are with machine on firm level ground, steered straight with frame level and on properly inflated tires
- Read boom angle and boom extension, then determine allowable load from chart
- Do not exceed rated loads as dangerous and unstable machine conditions will result
- Always travel with boom retracted in the lowest possible position