

Increases working height and productivity.

Skyjack's XStep maximises reach and productivity by providing operators with safe, increased access into and around tight, restricted spaces, such as ceiling openings and ceiling mounted structures.


- Improves accessibility in restricted areas
- Increases fleet flexibility
- Full height platform rails provide operator security
- One person installation process and no special tools or lifting equipment required
- Access to upper controls with XStep deployed or stowed
- Installed or removed in 5 minutes
- Compatible with SJ3215 and SJ3219
- Available as a factory fit or field install option







KEY FEATURES

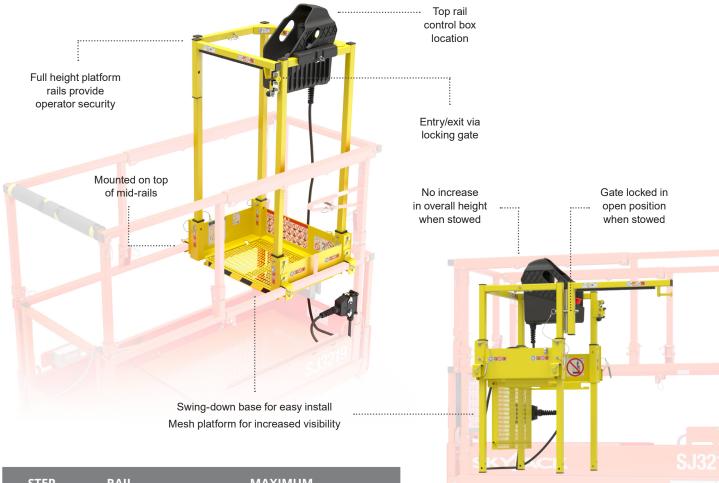

ı	STEP HEIGHT	RAIL HEIGHT	WEIGHT [‡]	MAXIMUM CAPACITY	PERSON
	48 cm	1.15 m	35 kg	113 kg	1

STOWED	OVERALL DIMENSIONS	PLATFORM	WIND
HEIGHT	(TOP RAIL, EXTERNAL)	AREA	RATING
0.97 m	0.51 m x 0.58 m	0.26 m ²	0 m/s

*Compatible with the following models: SJ3215, SJ3219

‡3 piece design for easy handling



Skyjack UK

Unit 1, Maes-y-Clawdd Maesbury Road Industrial Estate Oswestry, Shropshire, SY10 8NN Tel: +44 1691 676235 Fax: +44 1691 676239 ${\it Email: info@skyjackeurope.co.uk}$

Skyjack SAS

(France) 74 Rue Sibert F-42400 Saint Chamond France Tel: +33 (0) 4 78 73 53 32

Fax: +33 (0) 4 78 56 52 42

(Germany) Därmannsbusch 2a D-58456 Witten

Tel: +49 (0) 2302 20 26 909 Fax: +49 (0) 2302 20 25 671

Skyjack Hebebühnen GmbH

Skyjack AB (Sweden) Agnesbergsvägen 28

424 38 Agnesberg Sweden Tel: +46 (0) 31 21 22 45 Fax: +46 (0) 31 787 65 10

