


DC HEAVY DUTY PIPE RACK

For work applications where carrying capacity is critical, the heavy duty pipe rack is the ideal attachment for a safe and secure solution.

- Mounted at the rear of the platform for optimized platform space
- Carry pipe or conduit up to a maximum diameter of 4"
- Rated work load up to 593 lbs (269) kg on the pipe rack



KEY FEATURES

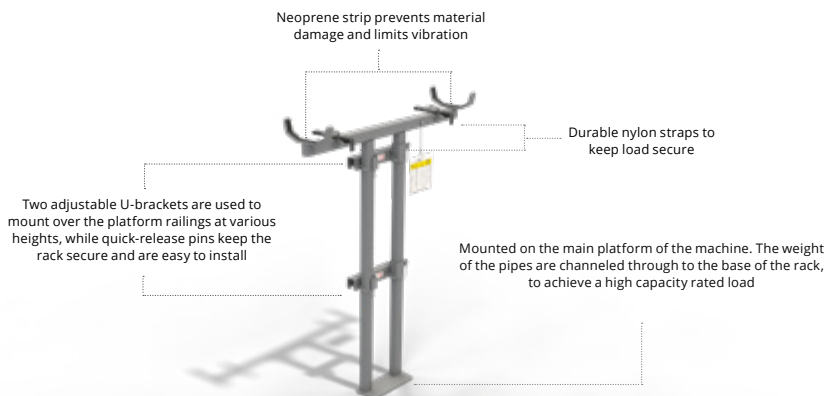

Use only on listed models		DC HEAVY DUTY PIPE RACK						
Model	SJ3215 E*		SJ3219 E*		SJ3220 E*		SJ3226 E*	
Serial Number	A100040000 +, C100040000 +		A100040000 +, C100040000 +		A101020000 +, C101020000 +		A101020000 +, C101020000 +	
Rated work load on pipe rack	185 lb (84 kg)		97 lb (44 kg)	185 lb (84 kg)	498 lb (226 kg)		185 lb (84 kg)	
Total rated work load including load on pipe racks	500 lb (227 kg) 2 Persons	500 lb (227 kg) 1 Persons	500 lb (227 kg) 2 Persons	500 lb (227 kg) 1 Persons	900 lb (408 kg) 2 Persons		500 lb (227 kg) 1 Persons	
Maximum wind speed	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)		0 mph (0 m/s)	

Model	SJ4726 E ‡		SJ4732 E ‡		SJ4740 E ‡			
Serial Number	A102020000 +, C102020000 +		A102020000 +, C102020000 +		A103020000 +, C103020000 +			
Rated work load on pipe rack	500 lb (227 kg)		185 lb (84 kg)		175 lb (80 kg)			
Total rated work load including load on pipe racks	1000 lb (454 kg) 2 Persons	1000 lb (454 kg) 1 Persons	700 lb (317 kg) 2 Persons	700 lb (317 kg) 1 Persons	770 lb (350 kg) 2 Persons			
Maximum wind speed	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)			

Model	SJ3215*		SJ3219*		SJ3220*		SJ3226*	
Serial Number	A/B100 000 001+		A/B100 000 001+		A/B101 000 001+		A/B101 000 001+	
Rated work load on pipe rack	185 lb (84 kg)		97 lb (44 kg)	185 lb (84 kg)	498 lb (226 kg)		185 lb (84 kg)	
Total rated work load including load on pipe racks	600 lb (272 kg) 2 Persons	600 lb (272 kg) 1 Persons	500 lb (227 kg) 2 Persons	500 lb (227 kg) 1 Persons	900 lb (408 kg) 2 Persons		500 lb (227 kg) 1 Persons	
Maximum wind speed	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)		0 mph (0 m/s)	

Model	SJ4726 ‡		SJ4732 ‡		SJ4740 ‡			
Serial Number	A/B102 000 001+		A/B102 000 001+		A/B103 000 001+			
Rated work load on pipe rack	590 lb (269 kg)		185 lb (84 kg)		175 lb (80 kg)			
Total rated work load including load on pipe racks	1000 lb (454 kg) 2 Persons	1000 lb (454 kg) 1 Persons	700 lb (317 kg) 2 Persons	700 lb (317 kg) 1 Persons	770 lb (350 kg) 2 Persons			
Maximum wind speed	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)	28 mph (12.5 m/s)	0 mph (0 m/s)			

Model	SJIII 3215*	SJIII 3219*	SJIII 3220‡	SJIII 3226‡	SJIII 4626‡	SJIII 4740‡
Serial Number	(S/N 151982 - 154002) (S/N 10 000 001+)	(S/N 236286 - 268399) (S/N 22 000 001+)	(S/N 613551 - 615766) (S/N 60 000 001+)	(S/N 28043 - 29999) (S/N 270000 - 279956) (S/N 27 000 001+)	(S/N 710000 - 719715) (S/N 70 000 001+)	(S/N 702000001+)
Rated work load on pipe rack	215 lb (98 kg)	215 lb (98 kg)	215 lb (98 kg)	75 lb (34 kg)	445 lb (202 kg)	148 lb (67 kg)
Total rated work load including load on pipe rack	550 lb (250 kg) 1 Person	550 lb (250 kg) 1 Person	900 lb (250 kg) 2 Persons	500 lb (227 kg) 1 Person	1000 lb (454 kg) 2 Persons	500 lb (227 kg) 2 Persons
Maximum wind speed	28 mph (12.5 m/s)					

*Maximum allowable pipe length is 10 ft (3.05 m) long by 4 in (10.20 cm) diameter

‡Maximum allowable pipe length is 20 ft (6.10 m) long by 4 in (10.20 cm) diameter

Overall weight (unloaded) 48 lb (21.8 kg)

Skyjack Head Office

55 Campbell Rd.
Guelph, ON Canada N1H 1B9
Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS)
Main Switchboard: 1-800-265-2738
Phone: 519-837-0888
Fax: 519-837-8104
Email: skyjack@skyjack.com

Skyjack Parts & Service

2525 Enterprise Circle
West Chicago, IL 60185 USA
Phone: 630-262-0005
Toll Free: 1-800-275-9522
Fax: 630-262-0006
Email: service@skyjack.com

www.skyjack.com